









PA12 POLYAMIDE SPIRALS with straight terminals




TECHNICAL FEATURES

Metric

	Length						5 m			7,5 m			10 m			12 m			15 m			30 m			
Code	D	d	De	Di	Lt1	Lt2	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Available Colour
SCA42XY	4	2	50	42	150	150	120	420	2500	190	490	3750	312	612	5000	313	613	6000	395	695	7500	805	1105	15000	B-A
SCA64XY	6	4	64	52	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000	B-A
SCA86XY	8	6	86	70	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000	B-A
SCA108XY	10	8	102	82	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000	B-A
SCA1210XY	12	10	126	102	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000	B-A

A : Orange

B : Blue

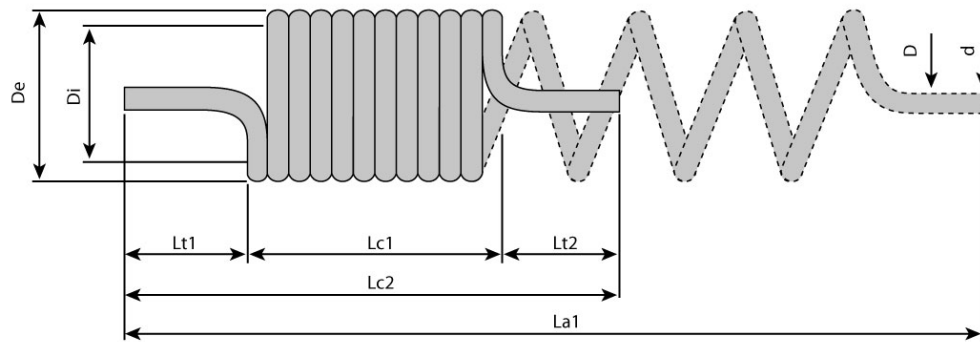

TECHNICAL FEATURES

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), other colors on request; and a Y, which corresponds to the spiral length.

CODE EXAMPLE: SCA1210A15 - PA12 Spiral with 12x10 standpipe ORANGE 15 m spiral.

Working temperature: from -40° to +80°C.

Max. working temperature of water-based fluids +70°C.

PRESSURES: Working and burst pressures as per the corresponding tube (</en/products/automotive-en/trailer-braking-systems-automotive/pa12-phl-tubing-en>) technical specification sheet.

For any further information about the optional items, please contact the sales office ()