

Rilsan® PA11 PHL Spirals with straight terminals



PNEUMATICS



CNG/LPG



OIL/GREASE FOR
LUBRICATION



HOT WATER/STEAM



LOW PRESSURE



FUEL



OTHER OILS



AIR



OTHER GASES



WATER-BASED FLUIDS



PAINTS



HYDRAULIC OIL



WATER


TECHNICAL FEATURES

Metric

	Lunghezza						5 m			7,5 m			10 m			12 m			15 m			30 m			
Codice	D mm	d mm	De mm	Di mm	Lt1 mm	Lt2 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Color diponibile
SC42XY	4	2	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000	B-A
SC425XY	4	2,5	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000	B-A
SC427XY	4	2,7	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000	B-A
SC53XY	5	3	62	52	150	150	125	425	2500	197	497	3750	270	570	5000	328	628	6000	415	715	7500	850	1150	15000	B-A
SC64XY	6	4	64	52	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000	B-A
SC86XY	8	6	86	70	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000	B-A
SC108XY	10	8	102	82	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000	B-A
SC1210XY	12	10	126	102	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000	B-A
SC1512XY	15	12	182	152	150	150	120	420	2500	195	495	3750	270	570	5000	330	630	6000	420	720	7500	870	1170	15000	B-A
SC15125XY	15	12,5	182	152	150	150	120	420	2500	195	495	3750	270	570	5000	330	630	6000	420	720	7500	870	1170	15000	B-A
SC1815XY	18	15	188	152	150	150	120	420	2500	200	500	3750	280	580	5000	344	644	6000	440	740	7500	920	1220	15000	B-A

A : Orange

B : Blue

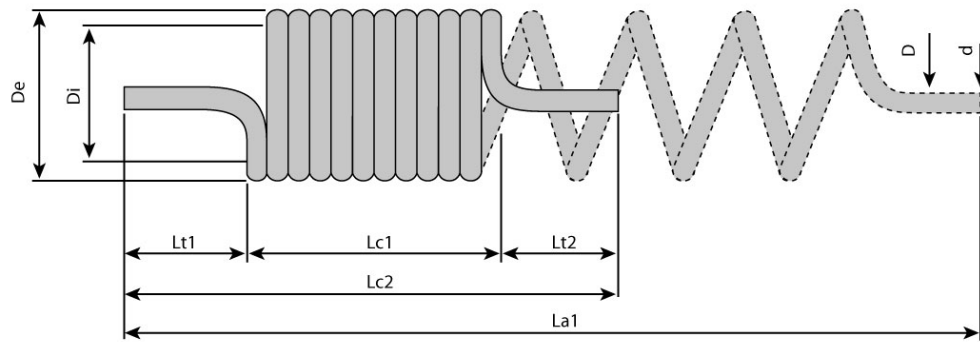

TECHNICAL FEATURES

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), other colors on request; and a Y, which corresponds to the spiral length.

CODE EXAMPLE: code Sc1210a15 - RILSAN® PA11 12x10 ORANGE 15 m spiral.

Working temperature: from -40° to +80°C.

Max. working temperature of water-based fluids +70°C.

PRESSURES: Working and burst pressures as per the corresponding tube ([/en/products/automotive-en/trailer-braking-systems-automotive/rilsanr-pa11-phl-tubing](#)) technical specification sheet.

For any further information about the optional items, please contact the sales office ()