

Rilsan® PA11 PHL Spirals



PNEUMATICS



LOW PRESSURE



AIR



PAINTS



CNG/LPG



FUEL



OTHER GASES



HYDRAULIC OIL



OIL/GREASE FOR
LUBRICATION



OTHER OILS



WATER-BASED FLUIDS



WATER


TECHNICAL FEATURES

Metric

	Length				5 m		7,5 m		10 m		12 m		15 m		20 m		24 m		30 m		
Code	D mm	d mm	De mm	Di mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Lc mm	La mm	Colors available
S42XY	4	2	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000	B-A
S425XY	4	2,5	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000	B-A
S427XY	4	2,7	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000	B-A
S53XY	5	3	62	52	145	2500	217	3750	290	5000	348	6000	435	7500	580	10000	696	12000	870	15000	B-A
S64XY	6	4	64	52	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000	B-A
S86XYP	8	6	66	50	230	2500	345	3750	460	5000	550	6000	690	7500	920	10000	1100	12000	1380	15000	B-A
S86XY	8	6	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000	B-A
S863XY	8	6,3	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000	B-A
S108XY	10	8	102	82	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000	B-A
S1210XY	12	10	126	102	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000	B-A
S1412XY	14	12	180	152	141	2500	212	3750	283	5000	340	6000	425	7500	566	10000	680	12000	850	15000	B-A
S1512XY	15	12	182	152	150	2500	225	3750	300	5000	360	6000	450	7500	600	10000	720	12000	900	15000	B-A
S15125XY	15	12,5	182	152	150	2500	225	3750	300	5000	360	6000	450	7500	600	10000	720	12000	900	15000	B-A
S1613XY	16	13	184	152	158	2500	237	3750	316	5000	380	6000	475	7500	632	10000	760	12000	950	15000	B-A
S1815XY	18	15	188	152	160	2500	240	3750	320	5000	384	6000	480	7500	640	10000	768	12000	960	15000	B-A
S2420XY	24	20	260	212	176	2500	220	3750	353	5000	353	6000	440	7500	586	10000	704	12000	880	15000	B-A

A : Orange

B : Blue

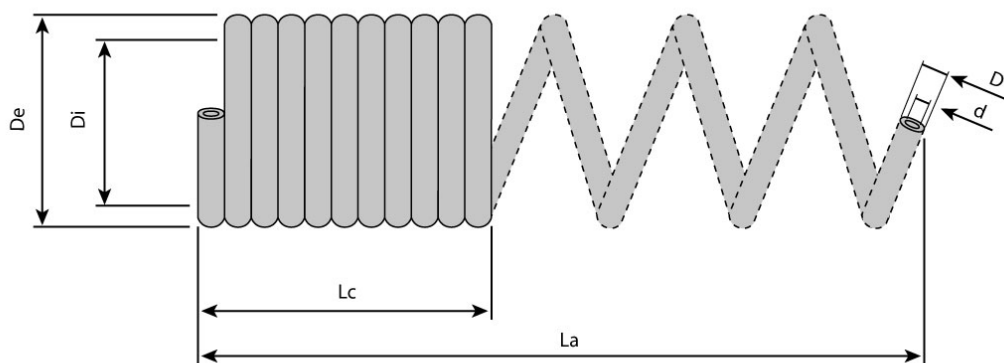

TECHNICAL FEATURES

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), other colors on request; and a Y, which corresponds to the spiral length.

CODE EXAMPLE: code S15125B10 – RILSAN® PA11 15x12.5 BLUE 10 m spiral.

Working temperature:

from -40° to +80°C. Max. working temperature of water-based fluids +70°C.

PRESSURES: Working and burst pressures as per the corresponding tube (</en/products/automotive-en/trailer-braking-systems-automotive/rilsanr-pa11-phl-tubing>)technical specification sheet.

OPTIONAL

 Color



Packing

For any further information about the optional items, please contact the sales office ()