

ACCESSORIES FOR MAGNETIC CYLINDERS SERIES 27



Coupling piece
Mod. GKF



Self aligning rod
Mod. GK



Threaded trunnion pin
Mod. T



Piston rod socket joint
Mod. GY



Swivel ball joint Mod. GA



Foot mount Mod. B



Foot mount Mod. B



Nose nut Mod. V



Rear trunnion bracket
Mod. I



Piston rod lock nut
Mod. U



Rear trunnion bracket
Mod. I



Rod fork end Mod. G



All accessories are supplied separately.


Foot mount Mod. B



Material: zinc-plated steel

Supplied with:
1x foot
1x front end cap nut mod. V

+ = add the stroke

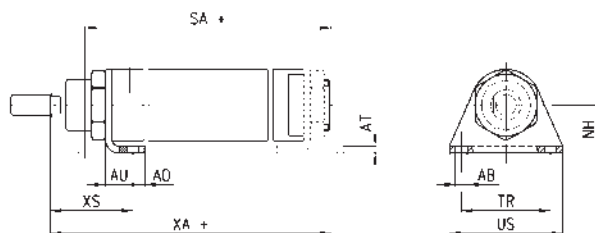

DIMENSIONS											
Mod.	Ø	AB	AO	AT	AU	NH	SA+	TR	US	XA+	XS
B-27-20	20	5,5	6	3	13	20	79	32	42	83	27
B-27-25	25	6,6	8	3	12,5	22	78	38	49	82	26
B-27-32	32	6,6	8	4	16	25	95	40	54	102	35
B-27-40	40	7	7	4	16	28	99	52	66	107	36


Foot mount Mod. B



Material: zinc-plated steel

Supplied with:
2x feet
4x screws

+ = add the stroke

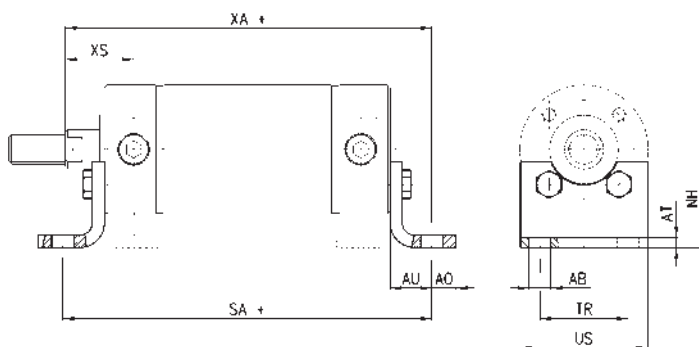

DIMENSIONS											
Mod.	Ø	AB	AO	AT	AU	NH	SA+	TR	US	XA+	XS
B-27-50	50	9	10	4	17	40	118	36	52	114	26
B-27-63	63	9	10	5	19	47	124	45	61	118	27


Threaded trunnion pin Mod. T



Material: stainless steel

Supplied with:
2x pins

+ = add the stroke

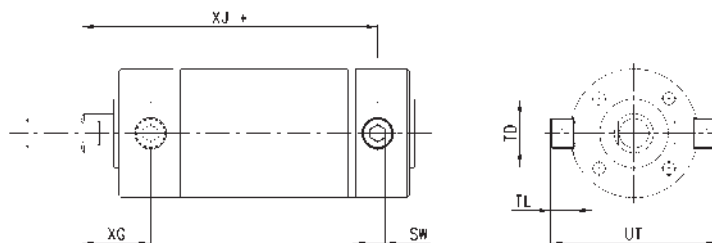



DIMENSIONS							
Mod.	Ø	SW	TD ¹⁹	TL	UT	XG	XJ+
T-27-50	50	6	12	9,5	68	26	84
T-27-63	63	6	14	11	84	26	86

Rear trunnion bracket Mod. I (Ø 20, 25, 32, 40)



Material: zinc-plated steel

Supplied with:
1x female hinge
1x pin
2x Seeger

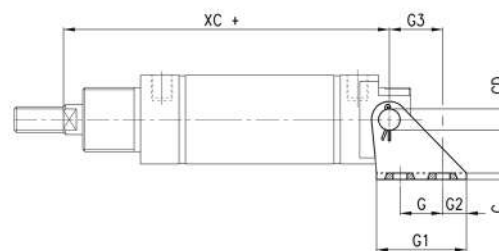

+ = add the stroke



DIMENSIONS												
Mod.	Ø	G	G1	G2	G3	C	XC+	AB	US	NH	CD	EW
I-27-20	20	15	30	8	18,5	1,5	77	5,5	15	20	6	12
I-27-25	25	15	33	9	20	2	78,5	6,6	18	22	8	14
I-27-32	32	15	35	10	20	2	93	6,6	20,5	25	8	16
I-27-40	40	20	42	11	25	3	96	7	26	28	10	20

Rear trunnion bracket Mod. I



Material: zinc-plated steel

Supplied with:
2x pins
2x feet

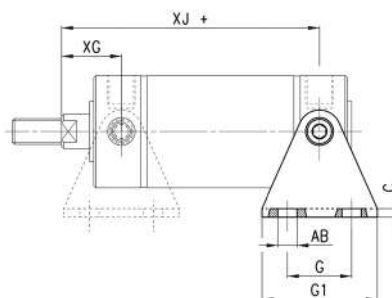



+ = add the stroke

DIMENSIONS													
Mod.	Ø	G	G1	C	XJ+	XG	AB	K1	K1	K2	K3	NH	UT
I-27-50	50	30	54	4	84	26	9	9	30,5	9	15	40	68
I-27-63	63	40	64	5	86	26	9	9	40,5	9	17,5	47	84

Rod fork end Mod. G



Material: zinc-plated steel
ISO 8140




DIMENSIONS										
Mod.	Ø	CK	LE	CM	CL	ER	CE	KK	B	B1
G-20	20	8	16	8	16	10	32	M8x1,25	22	14
G-25-32	25-32	10	20	10	20	12	40	M10x1,25	26	18
G-40	40-50	12	24	12	24	14	48	M12x1,25	32	20
G-50-63	63	16	32	16	32	19	64	M16x1,5	40	26

Swivel ball joint Mod. GA



Material: zinc-plated steel
ISO 8139




DIMENSIONS												
Mod.	Ø	ϕ CN ^(H7)	U	EN	ER	AX	CE	KK	ϕ T	Z	SW	
GA-20	20	8	9	12	12	16	36	M8x1,25	12,5	6,5	14	
GA-32	25-32	10	10,5	14	14	20	43	M10x1,25	15	6,5	17	
GA-40	40-50	12	12	16	16	22	50	M12x1,25	17,5	6,5	19	
GA-50-63	63	16	15	21	21	28	64	M16x1,5	22	7,5	22	

Piston rod socket joint Mod. GY



Material: zama and zinc-plated steel

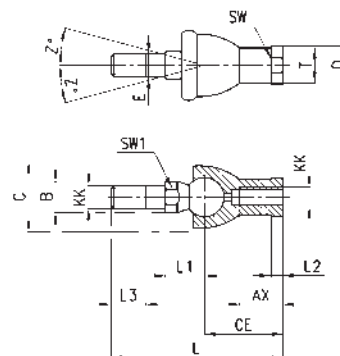


DIMENSIONS																
Mod.	Ø	KK	L	CE	L2	AX	E	ϕ B	ϕ C	T	D	L1	L3	SW1	SW	Z
GY-20	20	M8x1,25	65	32	5	16	8	12	24	12,5	16	16	12	10	14	15
GY-32	25-32	M10x1,25	74	35	6,5	18	10	14	28	15	19	19,5	15	11	17	15
GY-40	40-50	M12x1,25	84	40	6,5	20	12	19	32	17,5	22	21	17	17	19	15
GY-50-63	63	M16x1,5	112	50	8	27	16	22	40	22	27	27,5	23	19	22	11

Piston rod lock nut Mod. U



Material: zinc-plated steel
ISO 4035




DIMENSIONS				
Mod.	Ø	D	m	SW
U-20	20	M8x1,25	5	13
U-25-32	20-32	M10x1,25	6	17
U-40	40-50	M12x1,25	7	19
U-50-63	63	M16x1,5	8	24

Nose nut Mod. V




ISO 4035
V-27-25 / V-42-32 not according standard.
Material: zinc-plated steel



DIMENSIONS				
Mod.	Ø	D	m	SW
V-12-16	20	M16x1,5	8	24
V-27-25	25	M18x1,5	5	24
V-20-25	32	M22x1,5	10	32
V-42-32	40	M30x1,5	8	-

Self aligning rod Mod. GK


Material: zinc-plated steel

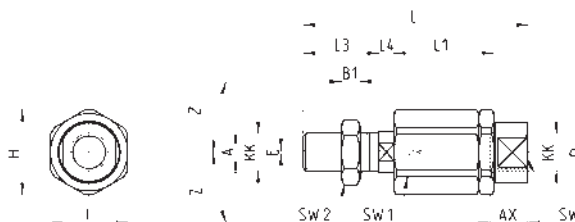

DIMENSIONS																	
Mod.	Ø	KK	L	L1	L3	L4	Ø A	Ø D	H	I	SW	SW1	SW2	B1	AX	Z	E
GK-20	20	M8x1,25	57	26	21	5	8	12,5	19	17	11	7	13	4	16	4	2
GK-25-32	25-32	M10x1,25	71,5	35	20	7,5	14	22	32	30	19	12	17	5	22	4	2
GK-40	40	M12x1,25	75,5	35	24	7,5	14	22	32	30	19	12	19	6	22	4	2
GK-50-63	50-63	M16x1,5	104	53	32	10	22	32	45	41	27	20	24	8	30	3	2

Coupling piece Mod. GKF

Material: zinc-plated steel

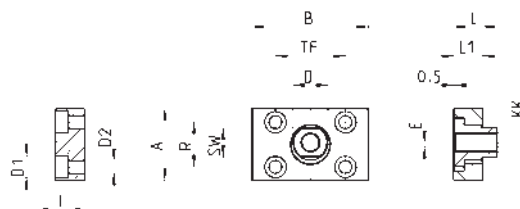

DIMENSIONS														
Mod.	Ø	KK	A	B	R	TF	L	L1	I	Ø D	Ø D1	Ø D2	SW	E
GKF-20	20	M8x1,25	30	35	20	25	22,5	10	-	14	5,5	-	13	1,5
GKF-25-32	25-32	M10x1,25	37	60	23	36	22,5	15	6,8	18	11	6,6	15	2
GKF-40	40	M12x1,25	56	60	38	42	22,5	15	9	20	15	9	15	2,5
GKF-50-63	50-63	M16x1,5	80	80	58	58	26,5	15	10,5	25	18	11	22	2,5