


Series E valves and solenoid valves

5/2-way monostable/bistable - 5/3 CC, CO, CP
With outlets on the body - For individual or manifold assembly
Size 10,5 mm

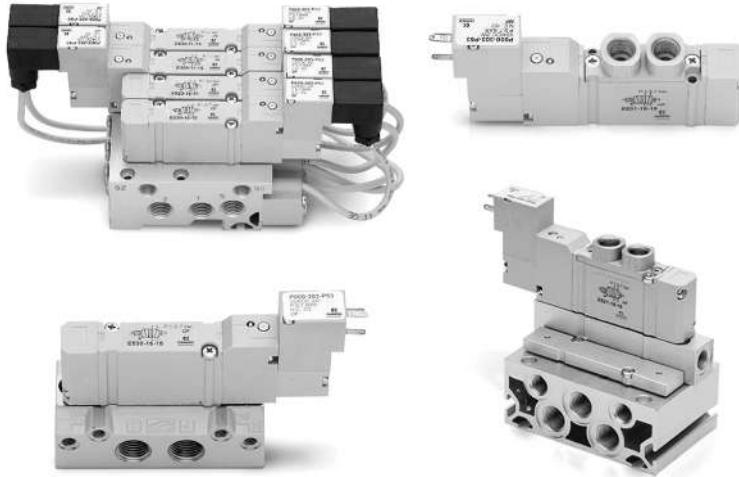

Series E valves have been designed to allow high flows with small overall dimensions. These valves are manufactured in three different sizes and are suitable for individual use or for mounting on manifolds. The manifolds allow a common inlet as well as the two exhausts and the pilot exhaust in common.

GENERAL DATA

Construction	spool-type
Valve functions	5/2, 5/3 CC CO CP
Materials	zamak body, aluminium spool and sub-bases; technopolymer end-covers, joints NBR
Ports	valve = M5; manifold = M5 - tube Ø4; sub-base = G1/8
Temperature	0°C min + 50°C max
Fluid	filtered air (5 µm or lower), without lubricant; if lubricated air is used, it is recommended to use ISOVG32 oil. Once applied the lubrication should never be interrupted.
Solenoid voltage	see coding
Voltage tolerance	± 10%
Power consumption	1W
Class of insulation	class F
Protection class	IP50

CODING EXAMPLE



E	5	2	1	-	11	-	10	-	K	1	3
E	SERIES										
5	FUNCTION: 5 = 5/2 6 = 5/3 Centres Closed 7 = 5/3 Centres Open 8 = 5/3 Centres in Pressure										
2	SIZE: 2 = 10,5 mm										
1	BODY TYPE: 1 = body with threaded plate										
11	ACTUATION: 11 = electro-pneumatic, bistable 16 = electro-pneumatic, monostable 33 = pneumatic bistable - tube 3 36 = pneumatic monostable - tube 4 C33 = pneumatic bistable - tube 4 C36 = pneumatic monostable - tube 4										
10	INTERFACE: 10										
K	TYPE OF SOLENOID: K										
1	SOLENOID DIMENSION: 1 = 10x10										
3	SOLENOID VOLTAGE: 1 = 6V DC 2 = 12V DC 3 = 24V DC										

Pneumatically actuated valve, monostable - size 10,5

5/2-way




Note: the pilot pressure should never be lower than the operating pressure.

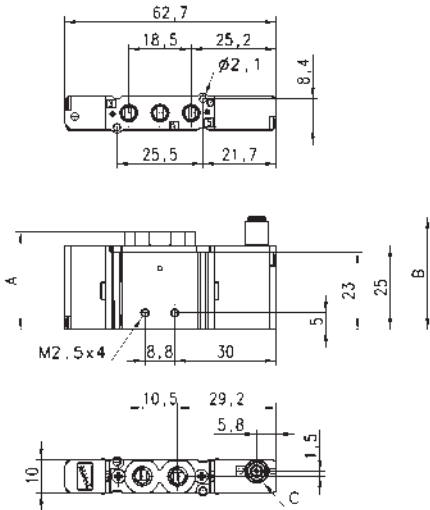

Mod.	A	B	C	Ports 1-3-5	Ports 2-4	Min pilot pressure (bar)	Working pressure (bar)	Flow rate (NL/min)
E521-36	29	33,4	Ø 3	M5	M5	2,5	2,5 ÷ 7	200
E521-C36	29	39,1	Ø 4	M5	M5	2,5	2,5 ÷ 7	200

Electropneumatically actuated valve, monostable - size 10,5

5/2-way

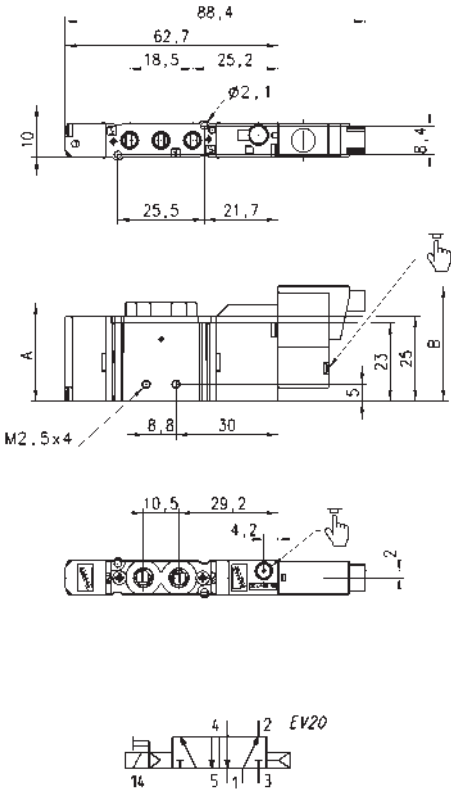

For solenoid valves with solenoid type K, use connector 121-8...


DIMENSIONS					
Mod.	A	Ports 1-3-5	Ports 2-4	working P. (bar)	Flow rate (NL/min)
E521-16-10-K1..	29	M5	M5	2,5 ÷ 7	200

Electropneumatically actuated valve, bistable - size 10,5

5/2-way



Use connector Mod. Mod. 121-8..

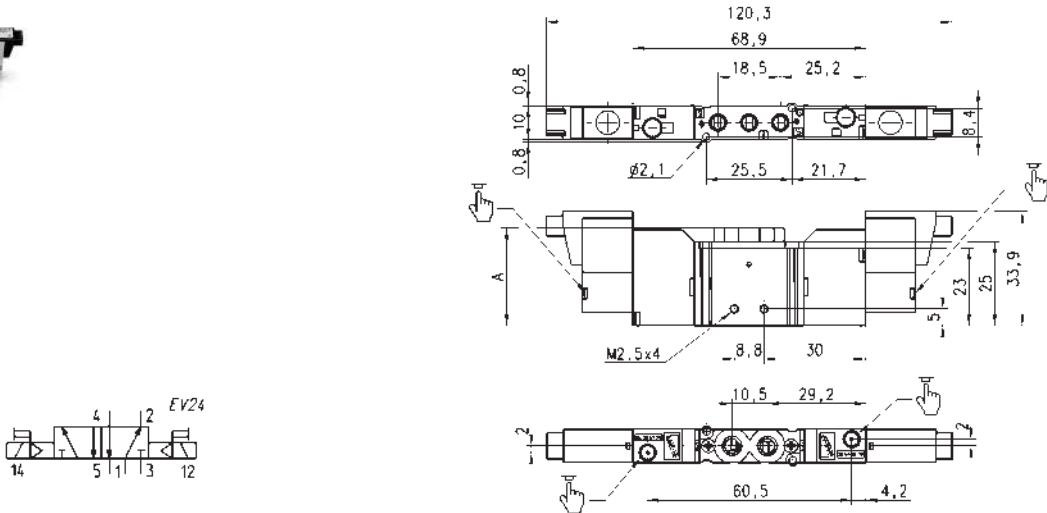



Mod.	A	Ports 1-3-5	Ports 2-4	working P. (bar)	Flow rate (NL/min)
E521-11-10-K1..	29	M5	M5	1 ÷ 7	200

Electropneumatically actuated valve - size 10,5



5/3-way
CC = Centres Closed
CO = Centres Open
CP = Centres in Pressure

Use connector Mod. 121-8...

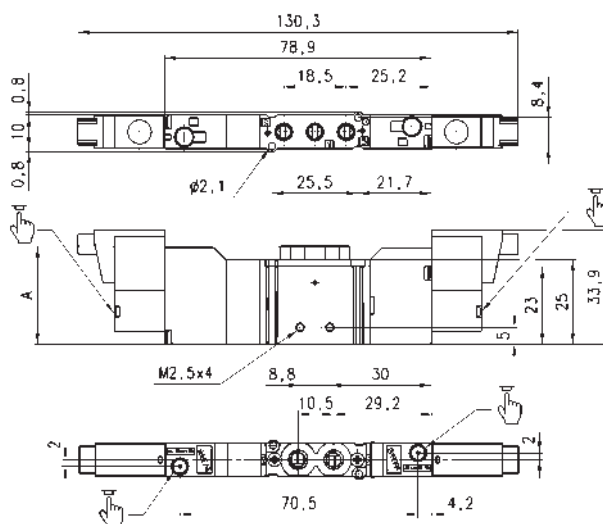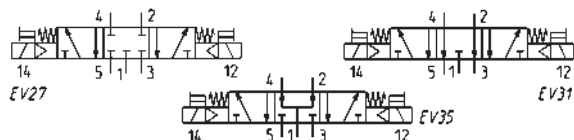

Mod.	A	Ports 1-3-5	Ports 2-4	working P. (bar)	Flow rate (NL/min)	Symbol
E621-11-10-K1..	29	M5	M5	2 ÷ 7	200	EV27
E721-11-10-K1..	29	M5	M5	2 ÷ 7	200	EV31
E821-11-10-K1..	29	M5	M5	2 ÷ 7	200	EV35

CODING EXAMPLE



E	5	2	0	-	11	-	10	-	K	1	3
E	SERIES:										
5	FUNCTION: 5 = 5/2 6 = 5/3 Centres Closed 7 = 5/3 Centres Open 8 = 5/3 Centres in Pressure										
2	SIZE: 2 = 10,5 mm										
0	BODY TYPE: 0 = body for sub-base										
11	ACTUATION: 11 = electropneumatic bistable 16 = electropneumatic monostable 33 = pneumatic bistable - tube Ø 3 36 = pneumatic monostable - tube Ø 3 C33 = pneumatic bistable - tube Ø 4 C36 = pneumatic monostable - tube Ø 4										
10	INTERFACE: 10										
K	TYPE OF SOLENOID: K										
1	SOLENOID DIMENSIONS: 1 = 10x10										
3	SOLENOID VOLTAGE: 1 = 6V DC 2 = 12V DC 3 = 24V DC										

Pneumatically actuated valve, monostable - size 10,5



5/2-way

The single base is ordered separately from the valve.
The pilot pressure should never be lower than the operating pressure.

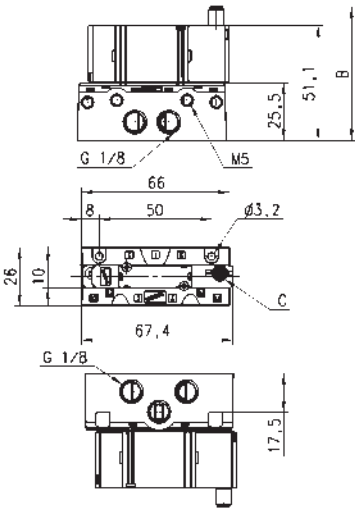

DIMENSIONS					
Mod.	B	C	min. pil P. (bar)	working P. bar	Flow rate (NL/min)
E520-36	59,5	Ø3	2,5	2,5 ÷ 7	280
E520-C36	65,2	Ø4	2,5	2,5 ÷ 7	280



Electropneumatically actuated valve, monostable - size 10,5

5/2-way



In case of separate pilot supply, the pilot pressure should never be lower than the operating pressure.

The single base is ordered separately from the valve.

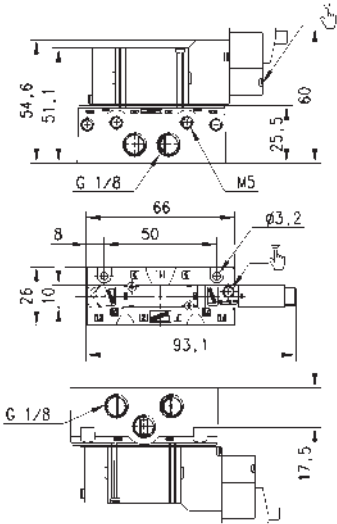



DIMENSIONS		
Mod.	working P. (bar)	Flow rate (l/min)
E520-16-10-K1..	2 ÷ 7	280

Electropneumatically actuated valve, bistable - size 10,5

5/2-way



The single base is ordered separately from the valve.

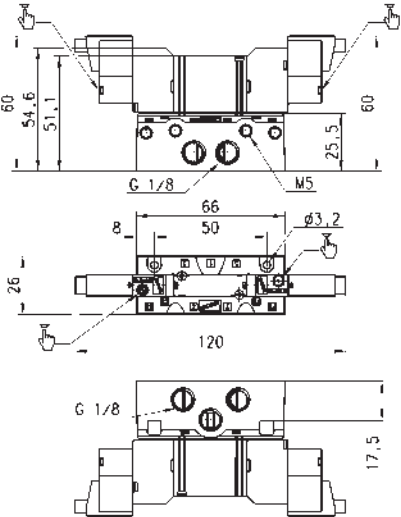



Mod.	working P. bar	Flow rate l/min
E520-11-10-K1..	2 ÷ 7	280

Electropneumatically actuated valve - size 10,5



5/3-way
CC = Centres Closed
CO = Centres Open
CP = Centres in Pressure

The single base is ordered separately from the valve

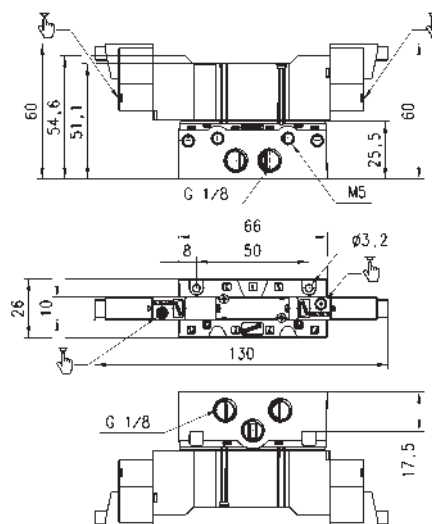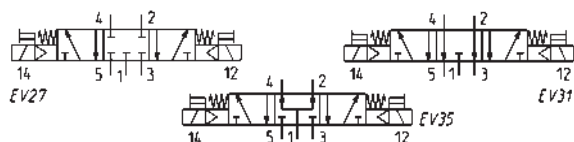

Mod.	working P. bar	Flow rate NI/min	Symbol
E620-11-10-K1..	2 ÷ 7	280	EV27
E720-11-10-K1..	2 ÷ 7	280	EV31
E820-11-10-K1..	2 ÷ 7	280	EV35

Torque for securing screws on manifolds and single sub-base

Mod.	Size (mm)	Torque (Nm)
E52...	10,5	0,3 ÷ 0,35

CODING EXAMPLE

E5	2	1	-	1	0	02
-----------	----------	----------	----------	----------	----------	-----------


E5	SERIES
2	SIZE: 2 = size 10,5
1	BODY TYPE: 0 = body for sub-base assembly 1 = body with threads or tube port
1	TYPE OF SUB-BASE: 0 = single sub-base with side outlets 1 = manifold for threaded valve 2 = manifold for body mounted valve
0	PORTS: 0 = for valves with outlets on the body 1 = threaded C = tube 4
02	N° OF POSITIONS: 01 = single 03, 04, 06, 08, 10, 12 = multiple

NOTE: When constructing manifolds with 10 or more stations, it is recommended, in order to reduce the risk of pressure drop within the assembly, that pressure is supplied to port 1 at each end of the block. The exhaust ports 3 and 5 at each end should also be utilized (size 10,5 and 16 mm). The same provision should be made for 5 station manifolds of the 19 mm valves. Manifolds complete with ports for external pilot supply are available on request.

Manifolds for valves with outlets on the body Size 10,5



The manifolds have been manufactured with common inlet and exhausts 3 and 5. There are also common exhausts for pilots 82 and 84.

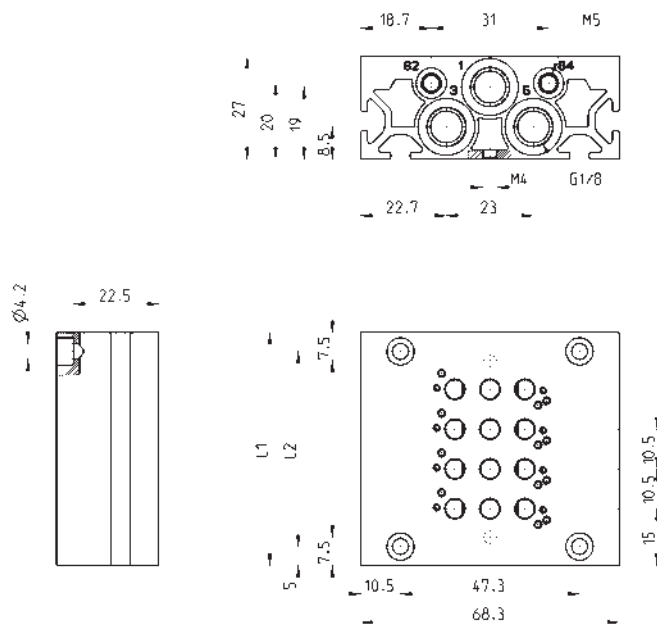


Note: the manifolds are supplied complete with the seals and the valves, fixing screws.

DIMENSIONS													
Mod.	Size	Nr positions	02	03	04	05	06	07	08	09	10	11	12
E521-10..	10.5	L1	40.5	51	61.5	72	82.5	93	103.5	114	124.5	135	145.5
E521-10..	10.5	L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5

Single sub-base for base mounted valves - size 10,5



Note: The valve and its single sub-base are available on request.

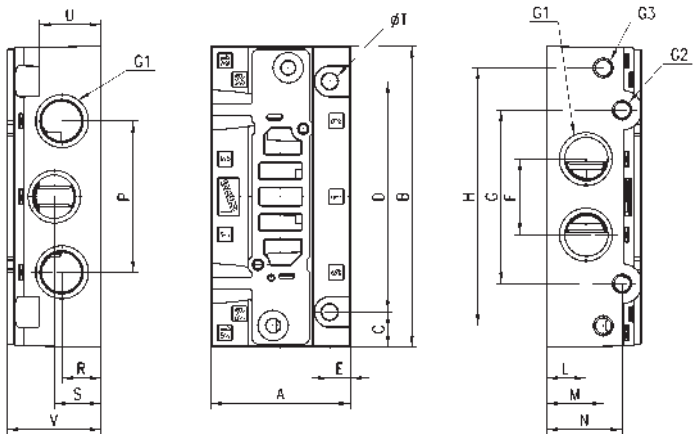


DIMENSIONS																					
Mod.	Size	G1	G2	G3	A	B	C	D	E	F	G	H	L	M	N	P	R	S	T	U	V
E520-0101	10,5	G1/8	M5	M5	26	66	8	50	4	15	37,3	57,3	8,2	17	18	24,5	8,2	17,2	32	17,5	25,5

Manifolds for base mounted valves size 10,5




The manifolds have been manufactured with common inlet 1 and exhaust 3 and 5. There are also common exhausts for pilots 82 and 84.

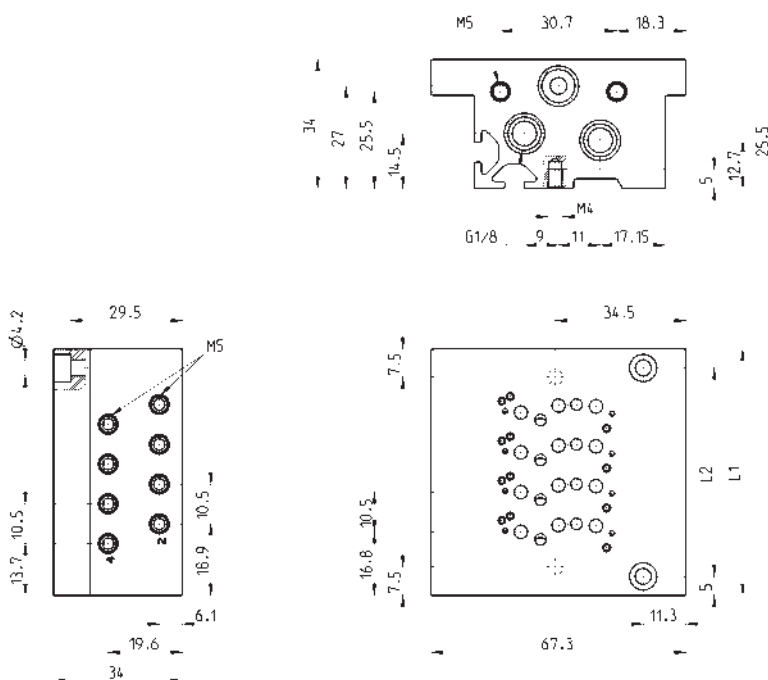

DIMENSIONS													
Mod.	Size	Nr positions	02	03	04	05	06	07	08	09	10	11	12
E520-21..	10.5	L1	44	54.5	65	75.5	86	96.5	107	117.5	128	138.5	149
E520-21..	10.5	L2	34	44.5	55	65.5	76	86.5	97	107.5	118	128.5	139
E520-2C..	10.5	L1	44	54.5	65	75.5	86	96.5	107	117.5	128	138.5	149
E520-2C..	10.5	L2	34	44.5	55	65.5	76	86.5	97	107.5	118	128.5	139

Manifolds with valves with outlets on the body - size 10.5

5/2 and 5/3, ports M5

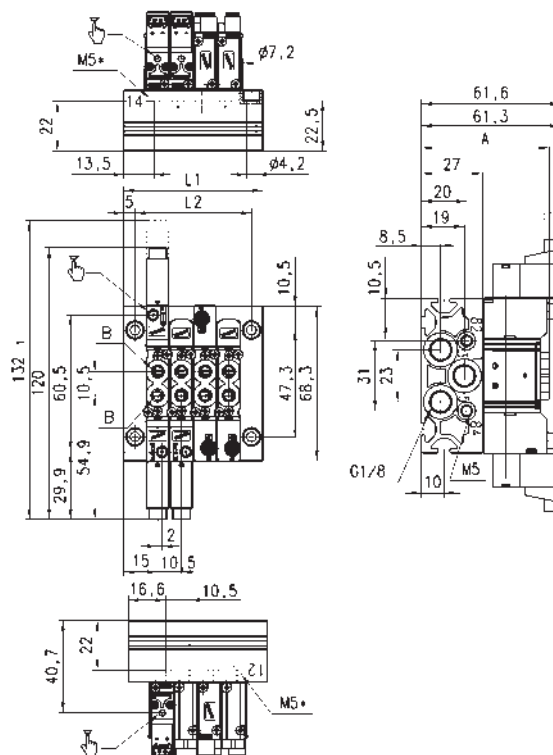


DIMENSIONS					
Mod.	A	B	L1 - L2 N° 1 Position	L1 - L2 N° 2 Positions	Fixed quote for position
E521	56,6	M5	40,5 - 30,5	51 - 41	10,5
E52C	65,1	4/2	40,5 - 30,5	51 - 41	10,5

Size referred to 5/3 valve M5*
Separate pilot supply on request.

Manifolds with valves for subbase - size 10.5

5/2 and 5/3

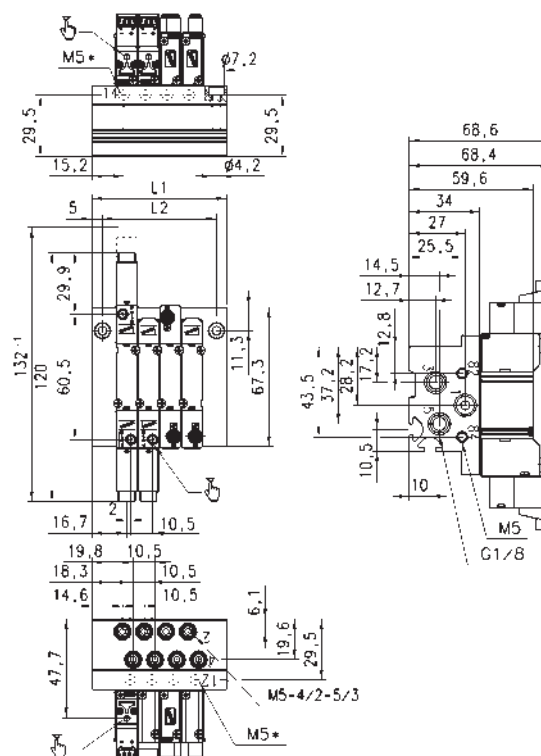

DIMENSIONS											
N° Positions	2	3	4	5	6	7	8	9	10	11	12
L1	44	54,5	65	75,5	86	96,5	107	117,5	128	138,5	149
L2	34	44,5	55	65,5	76	86,5	97	107,5	118	128,5	139


(1) Size referred to 5/3 valve
M5* Separate pilot supply on
request.

Mounting brackets for DIN rail



DIN EN 50022 (7,5mm x 35mm - width 1)
Suitable for all manifolds.

Supplied with:
2x plates
2x screws M4x6 UNI 5931




Mod.

PCF-E520

Horizontal mounting foot bracket for valves with outlets on the body



The following is supplied:
1x foot bracket
2x screws.

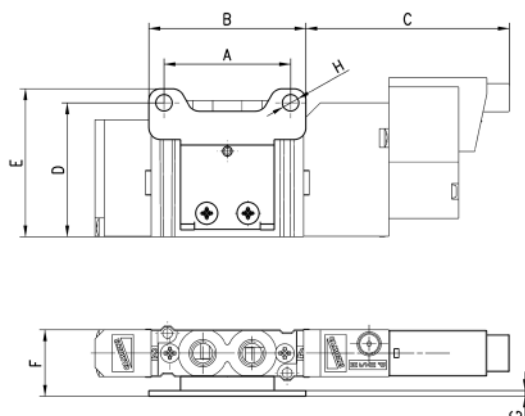


DIMENSIONS

Mod.	Size	A	B	C	D	E	F	G	H
B1-E521	10,5	27	33,5	43,4	28,5	31,5	14,2	1,2	3,5

Vertical mounting foot bracket for valves with outlets on the body



The following is supplied:
1x foot bracket
2x screws
Monostable valves only.

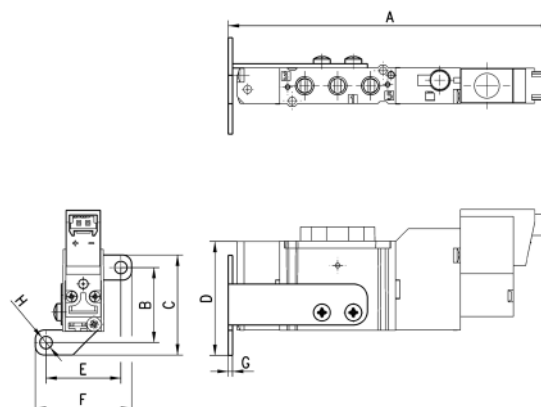


DIMENSIONS

Mod.	Size	A	B	C	D	E	F	G	H
B2-E521	10,5	90,8	21	28	31,9	21	27	1,2	3,5

Blanking plate for manifolds - valves with outlets on the body



The following is supplied:
1x blanking plate
2x screws
1x seal.

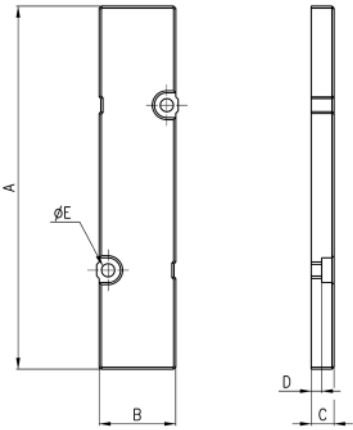


DIMENSIONS						
Mod.	Size	A	B	D	ØE	
TP-E521	10,5	66	10	3,5	2,1	

Blanking plate for manifolds - base mounted valves



The following is supplied:
1x blanking plate
2x screws
1x seal.

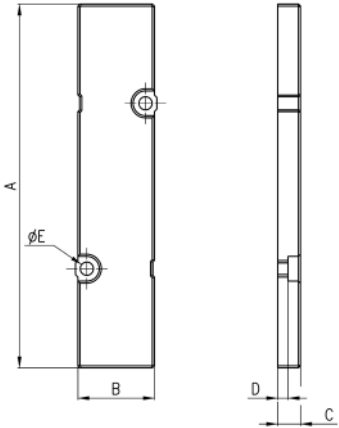


DIMENSIONS						
Mod.	Size	A	B	C	D	ØE
TP-E520	10,5	66	10	6	3,5	2,1

Intermediate plate for valves to provide a separate supply in 1



Base mounted valves.
The following is supplied:
1x plate
2x screws
1x interface seal
2x O-Ring.

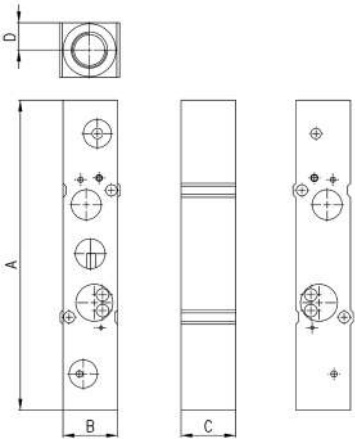


DIMENSIONS						
Mod.	Size	A	B	C	D	E
PCP-E521	10,5	72,5	10	10	5	M5

Intermediate plate for valves to provide a separate supply in 1



Base mounted valves.
The following is supplied:
1x plate
2x screws
1x interface seal
2x OR.

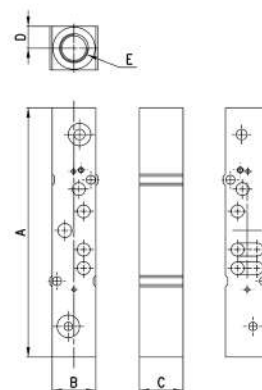


DIMENSIONS						
Mod.	Size	A	B	C	D	E
PCP-E520	10,5	72,5	10	10	5	M5

Intermediate plate for valves to provide separate supply in 3 and 5



Kits for valves with outlets on the body
Mod. E2*1-**.
The following is supplied:
1x plate
2x screws
1x interface seal
2x OR.

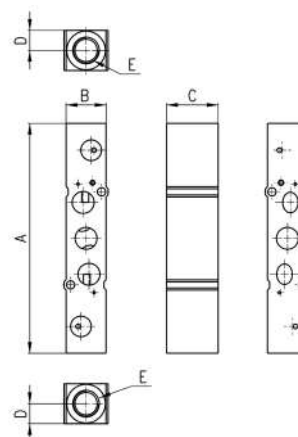


DIMENSIONS						
Mod.	Size	A	B	C	D	E
PCS-E521	10,5	76	10	10	5	M5

Intermediate plate for valves to provide separate supply in 3 and 5



Kits for valves mounted on sub-base
Mod. E2*0-**.
The following is supplied:
1x plate
2x screws
1x interface seal
2x OR.

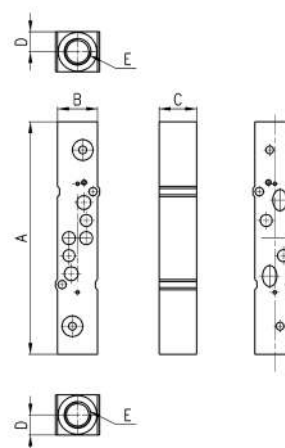

DIMENSIONS						
Mod.	Size	A	B	C	D	E
PCS-E520	10,5	76	10	10	5	M5