

HDZ6 Contactor Relay

Order Information



Product Name	Contact	Coil Voltage	Coil Power Type
HDZ6	32	M	
	↓	↓	↓
	32:3NO+2NC 41:4NO+1NC	B:24V ... X:440V	Default:50HZ 7:50/60HZ

Contact Form		Reference
1	1	HDZ6 41 □□
3	2	HDZ6 32 □□

Code Table of Coil Voltage

Coil Voltage (V)	24	36	48	110	127	220	380	415	440
50HZ	B	C	E	F	S	M	Q	L	X
50/60HZ	B7	-	E7	F7	-	M7	Q7	-	-


HDZ6 Contactor Relay

Main Technical Parameter

Main Technical Parameter

Type		HDZ6-41	HDZ6-32
Contact		4NO+1NC	3NO+2NC
AC-15	Rated Operational Voltage	AC230V	AC400V
	Rated Operational Current	1.6A	0.95A
DC-13	Rated Operational Voltage	DC125V	DC220V
	Rated Operational Current	0.55A	0.27A
Rated Insulation Voltage		690V	
Rated Thermal Current		10A	
Mechanic Durabilities		10 Million Times	
Electric Durabilities		1 Million Times	
Control Circuit Voltage (Us)	50Hz	24V 36V 48V 110V 127V 220V 380V 415V 440V	
	50/60Hz	24V 48V 110V 220V 380V	
Operational Voltage Range		85%~110% Us	
Drop-out Voltage Range		20%~75% Us	
Wiring Ability		≤2.5(X2) mm ²	


Diagram for Accessory Installation

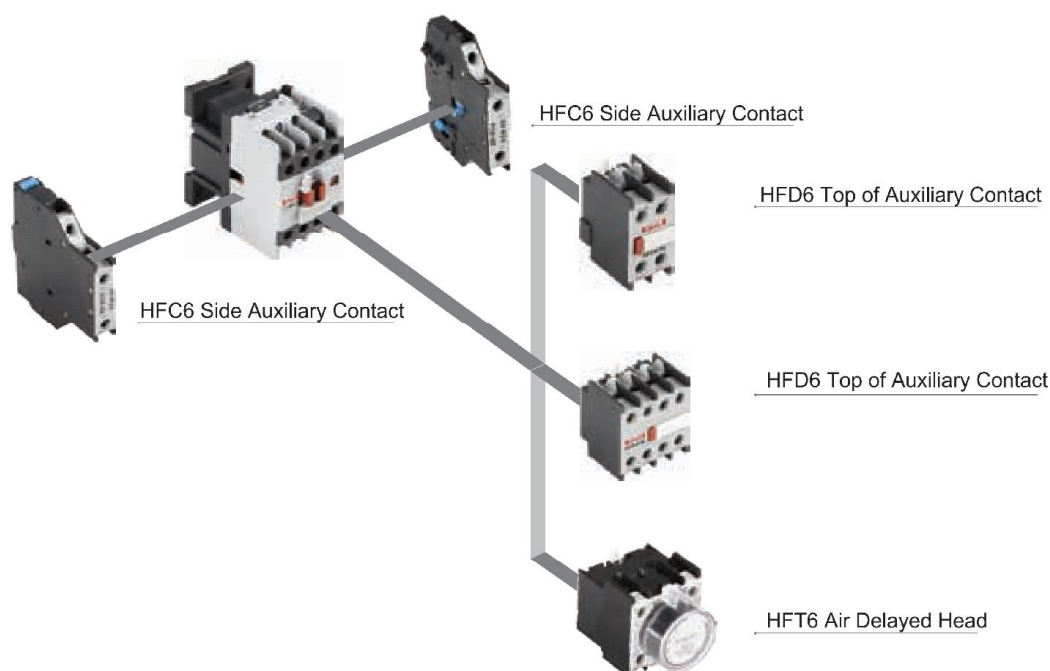

Note: the accessories of HDZ6 are in common use with HDC6, and please refer to P209 for more information about the accessories.


HDZ6 Contactor Relay

Overall Dimension of Installation

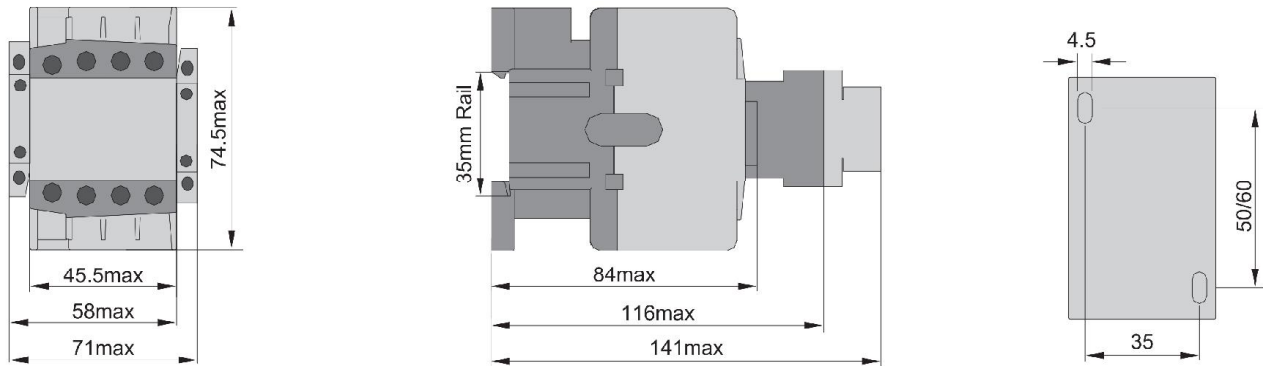

Wiring Diagram

HDZ6-41



HDZ6-32

