

Main Terminals Bolt On



95 mm² Feed Through Terminal Block
High Insulation, Bolt on Connection
For 35 mm DIN Rail



150 mm² Feed Through Terminal Block
High Insulation, Bolt on Connection
For 35 mm DIN Rail



240 mm² Feed Through Terminal Block
High Insulation, Bolt on Connection
For 35 mm DIN Rail



| Electrical Ratings |
|---------------------|
| CE (EN 60947-7-1) |
| cRUus |
| VDE (IEC 60947-7-1) |
| CSA |
| IECEX |

| Connection Data |
|--|
| Conductor cross section solid (min.-max.) |
| Conductor cross section stranded (min.-max.) |
| AWG Conductor |
| Insulation Stripping Length |
| Torque (min.-max.) |
| Hole Diameter |
| Bolt Diameter |
| Screwdriver |

| Technical Data |
|--|
| Rated Impulse Voltage |
| Insulation material group / |
| Gauge pin code according to IEC 60947-1 |
| Protection class / Protection conductor type |

| Ordering Data |
|---------------|
| Beige |
| Grey |

| Partition Plate |
|------------------------------|
| xx: available in all colours |

| Cross Connection - Comb Connection |
|------------------------------------|
| |

| Isolation Cover |
|-----------------|
| |

| End Bracket |
|-------------------|
| xx: Beige or Grey |
| |

| Test Plug and Sockets |
|-----------------------|
| |

| Warning Label |
|-------------------------------|
| Available in White and Yellow |
| |

| Group Marking |
|---------------|
| |

| Unprinted Markers |
|-------------------|
| |

| Voltage, V ~ | Current, A | Cross Section |
|--------------|------------|---------------|
| 1000 | 232 | 95 mm² |
| | | |
| | | |
| | | |

| 25 - 95 mm² | |
|-------------|--|
| 35 - 95 mm² | |
| AWG 4 - 3/0 | |
| 29 mm | |
| 25 - 30 Nm | |
| 10.5 mm | |
| 10 mm | |
| DIN3110 | |

| 8/3 | |
|----------|--|
| 1/NA | |
| IP 10/ - | |

| Terminal | Qty. | End Plate | Qty. |
|------------|------|-----------|------|
| ERB95BEIGE | 4 | | |
| ERB95GREY | 4 | | |

| Partition | Qty. | Partition | Qty. |
|-----------|------|-----------|------|
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| CCB95/2 | 5 | | |
| CCB95/3 | 5 | | |
| CCB95/4 | 5 | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| IC95 | 4 | | |
| | | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| ES1xx | 100 | | |
| ES4xx | 100 | | |
| ES7xx | 50 | | |
| ES6xx | 50 | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| | | | |
| | | | |
| | | | |

| With Symbol | Qty. | Without Symbol | Qty. |
|-------------|------|----------------|------|
| WL5 | 50 | WL5S | 50 |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| GM1-1 | 25 | | |
| GM1-2 | 25 | | |
| GM2-2 | 25 | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| DG10/5 | 440 | DG10/10 | 200 |
| DG10/6 | 360 | | |
| DG10/8 | 260 | | |

| Voltage, V ~ | Current, A | Cross Section |
|--------------|------------|---------------|
| 1000 | 309 | 150 mm² |
| | | |
| | | |
| | | |

| 30 - 150 mm² | |
|---------------------|--|
| 50 - 150 mm² | |
| AWG 2/0 - 300 kcmil | |
| 34 mm | |
| 25 - 30 Nm | |
| 13 mm | |
| 12 mm | |
| DIN3110 | |

| 8/3 | |
|----------|--|
| 1/NA | |
| IP 10/ - | |

| Terminal | Qty. | End Plate | Qty. |
|-------------|------|-----------|------|
| ERB150BEIGE | 4 | | |
| ERB150GREY | 4 | | |

| Partition | Qty. | Partition | Qty. |
|-----------|------|-----------|------|
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| CCB150/2 | 5 | | |
| CCB150/3 | 5 | | |
| CCB150/4 | 5 | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| IC150 | 4 | | |
| | | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| ES1xx | 100 | | |
| ES4xx | 100 | | |
| ES7xx | 50 | | |
| ES6xx | 50 | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| | | | |
| | | | |
| | | | |

| With Symbol | Qty. | Without Symbol | Qty. |
|-------------|------|----------------|------|
| WL5 | 50 | WL5S | 50 |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| GM1-1 | 25 | | |
| GM1-2 | 25 | | |
| GM2-2 | 25 | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| DG10/5 | 440 | DG10/10 | 200 |
| DG10/6 | 360 | | |
| DG10/8 | 260 | | |

| Voltage, V ~ | Current, A | Cross Section |
|--------------|------------|---------------|
| 1000 | 415 | 240 mm² |
| | | |
| | | |
| | | |

| 70 - 240 mm² | |
|---------------------|--|
| 70 - 240 mm² | |
| AWG 2/0 - 500 kcmil | |
| 34 mm | |
| 30 - 35 Nm | |
| 17 mm | |
| 16 mm | |
| DIN3110 | |

| 8/3 | |
|----------|--|
| 1/NA | |
| IP 10/ - | |

| Terminal | Qty. | End Plate | Qty. |
|-------------|------|-----------|------|
| ERB240BEIGE | 4 | | |
| ERB240GREY | 4 | | |

| Partition | Qty. | Partition | Qty. |
|-----------|------|-----------|------|
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| CCB240/2 | 5 | | |
| CCB240/3 | 5 | | |
| CCB240/4 | 5 | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| IC240 | 4 | | |
| | | | |
| | | | |
| | | | |


| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| | | | |
| | | | |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| | | | |
| | | | |
| | | | |

| With Symbol | Qty. | Without Symbol | Qty. |
|-------------|------|----------------|------|
| WL5 | 50 | WL5S | 50 |
| | | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| GM1-1 | 25 | | |
| GM1-2 | 25 | | |
| GM2-2 | 25 | | |
| | | | |

| Part Number | Qty. | Part Number | Qty. |
|-------------|------|-------------|------|
| | | | |
| | | | |
| | | | |

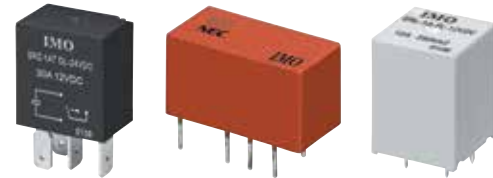

DON'T DROP THE BATON!

IMO's relay manufacturing goes back as far as 1972, and over the years we have strived to innovate and produce new types of relays for developing technologies. In 1984 we developed the first BT Type 47 Telecom Relay, and again in 1990 we launched the first BABT compliant isolation relay for data transfer, confirming our place as one of the leading global relay manufacturers. Today, our range of Industrial Relays include Signal Relays, Power Relays, Automotive Relays and Solar Relays, and range of compatible sockets.

IMO's range of Industrial Relays are available with either an AC or DC coil, and suitable for PCB mounting or plug-in via a dedicated socket. We also offer a range of slimline DIN Rail mountable relays which are just 6mm thick, and provide substantial space savings in a panel when compared to traditional plug-in type relays.

- Wide range for use in virtually any application
- VDE, UR and cUR approvals
- Relay manufacturing market leader and innovator
- Range of compatible sockets available



Scan this QR code using your smartphone to view our [Relay Range](#)