

ACCESSORIES FOR SERIES 40 CYLINDERS



Rear trunnion, male
Mod. L



Self aligning rod
Mod. GK



Swivel combination Mod.
C+L+S



Clevis pin Mod. S



90° Swivel combination
Mod. ZS



Counter bracket for
centre trunnion Mod. BF



Rod fork end Mod. G



Front and rear flange
Mod. D-E



Centre trunnion Mod. F



Foot mount Mod. B



Swivel ball joint Mod. GA



Female trunnion
Mod. C-H




Piston rod lock nut
Mod. U



All accessories are supplied separately except for piston rod lock nut Mod. U.
Details about proximity switches and their brackets can be found in the dedicated section.

Swivel combination Mod. C+L+S

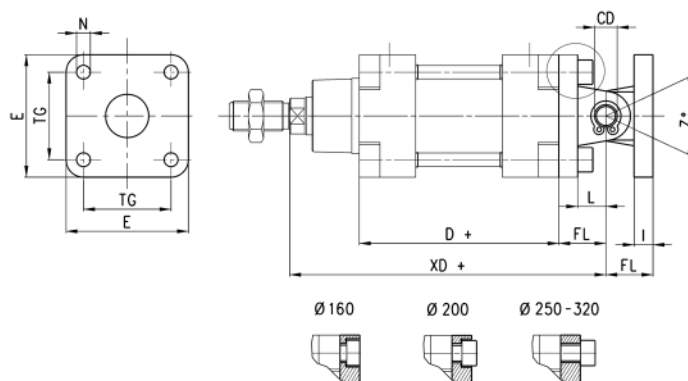


+ = add the stroke

DIMENSIONS											
Mod.	Ø	E	TG	øN	D+	XD+	øCD	L	FL	I	Z° (max)
C+L+S	160	180	140	18	180	315	30	35	55	20	25
C+L+S	200	220	175	18	180	335	30	35	60	25	20
C+L+S	250	270	220	22	200	375	40	45	70	25	33
C+L+S	320	350	270	30	220	420	40	50	80	30	30

Counter bracket for centre trunnion Mod. BF



Supplied with 2 supports
in Aluminium

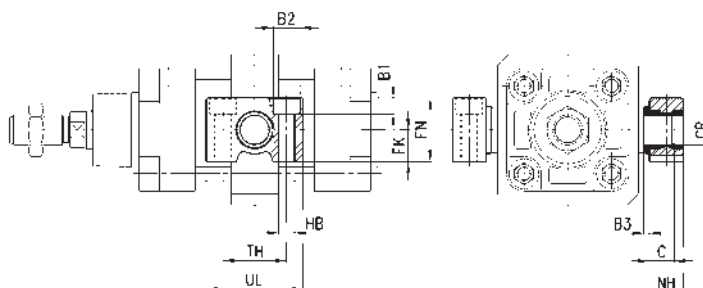


DIMENSIONS												
Mod.	Ø	øCR	NH	C	B3	TH	UL	FK	FN	B1	øB2	øHB
BF-160-200	160-200	32	35	17,5	4	60	92	30	60	16	26	18

Rod fork end Mod. G

ISO 8140


Material:
- zinc-plated steel



DIMENSIONS										
Mod.	Ø	ØCK	LE	CM	CL	ER	CE	KK	B	ØB1
G-160-200	160-200	35	72	35	70	44	144	M36x2	92	60
G-250	250	40	84	40	85	-	168	M42x2	96	70
G-320	320	50	96	50	90	73	192	M48x2	120	80

Swivel ball joint Mod. GA


ISO 8139



DIMENSIONS												
Mod.	Ø	ØCN	U	EN	ER	AX	CE	KK	ØT	Z	SW	
GA-160-200	160-200	35	28	43	40	56	125	M36x2	46	6	50	
GA-250	250	40	33	49	-	60	142	M42x2	55	17	55	
GA-320	320	50	45	60	58.5	65	160	M48x2	65	12	65	

Clevis pin Mod. S


Supplied with:
1x centering pin
2x seeger in steel



DIMENSIONS						
Mod.	Ø	d	L	L1	L2	L3
S-160-200	160-200	30	180.5	172	1.6	4.25
S-250	250	40	210	202	1.85	4.5
S-320	320	45	236	222	1.85	7

Piston rod lock nut Mod. U


ISO 4035
Material: zinc-plated steel



DIMENSIONS				
Mod.	Ø	D	m	SW
U-160-200	160-200	M36x2	14	55
U-250	250	M42x2	16	65
U-320	320	M48x2	24	75

Self aligning rod Mod. GK

Material: zama and zinc-plated steel.

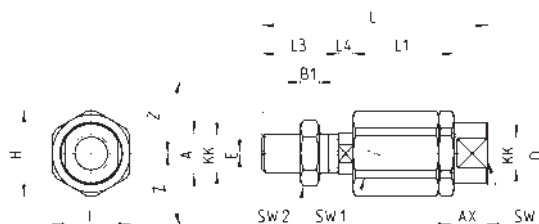

DIMENSIONS																
Mod.	Ø	KK	L	L1	L3	L4	ØA	ØD	H	I	SW	SW1	SW2	B1	AX	Z
GK-160-200	160-200	M36x2	190	77	72	15.5	39	57	75	70	54	32	55	14	68	4